

2022

RENEGADE® SPORT

Value-oriented with exceptional handling, bump capability and light off-trail riding.



RENEGADE® SPORT
600 EFI SHOWN

RENEGADE® SPORT
600 ACE™ SHOWN

// PACKAGE HIGHLIGHTS

- Rotax® 600 ACE™ with 420W magneto and 600 EFI engines available
- HPG™ rear shock
- 4.5 in. digital display
- RAS™ 3 front suspension
- SC™-5M rear suspension
- Standard electric start
- Glove box with 4 L/1 gal of storage
- Low windshield (14 in.)
- D.E.S.S.™ key (600 ACE™)
- Brembo brake with braided stainless-steel brake line
- Ergo-step side panels
- U-shaped aluminum handlebar with integrated J-hooks
- Pilot 5.7 skis
- NEW standard with two sets of LinQ attachment points

ROTAX® ENGINE	600 EFI	600 ACE™
Engine details	Liquid-cooled, two-stroke	Liquid-cooled, four-stroke D.O.H.C., dry sump
Horsepower	85	62
Cylinders – Displacement	2 – 599.4 cc	2 – 600 cc
Bore – Stroke	72.3 mm – 73 mm	74 mm – 69.7 mm
Carburation	EFI	EFI
Fuel type – Octane	Regular unleaded – 87	Regular unleaded – 87
Fuel tank	36 L/9.5 US gal	36 L/9.5 US gal
Oil tank capacity	3.4 L/3.6 qt	2.1 L/2.2 qt

POWERTRAIN	600 EFI	600 ACE™
Drive clutch	pDrive™ with slider shoes	eDrive™ II
Driven clutch	QRS	QRS
Drive sprocket pitch	73 mm/2.86 in.	73 mm/2.86 in.

DRY WEIGHT	600 EFI	600 ACE™
Dry weight	200 kg/442 lb	213 kg/469 lb


DIMENSIONS	600 EFI	600 ACE™
Overall vehicle length	3,038 mm/119.6 in.	3,038 mm/119.6 in.
Overall vehicle width	1,217 mm/47.9 in.	1,217 mm/47.9 in.
Overall vehicle height	1,267 mm/49.9 in.	1,267 mm/49.9 in.
Ski stance	1,077 mm/42.4 in.	1,077 mm/42.4 in.
Track	Cobra:	
(Length x Width x Profile)	137 x 15 x 1.25 in.	

COLOR	600 EFI	600 ACE™
Sunburst Yellow / Black		

SUSPENSION	600 EFI	600 ACE™
Front suspension	RAS™ 3	
Front shock	Motion Control	
Front suspension travel	220 mm/8.7 in.	
Rear suspension	SC™-5M	
Center shock	Motion Control	
Rear shock	HPG™	
Rear suspension travel	245 mm/9.6 in.	

FEATURES	600 EFI	600 ACE™
Frame	REV® Gen4	
Bodywork	Narrow design (2-stroke engines)	Wide design (4-stroke engines)
Skis	Pilot™ 5.7	
Seating	Trail performance (2-stroke engines)	Trail with storage (4-stroke engines)
Handlebar	U-shaped aluminum with J-hooks	
Riser block height	120 mm/4.7 in.	
Starter	Electric	
Reverse	RER™ (600 EFI)	Mechanical (600 ACE™)
Brake system	Brembo brake with stainless-steel braided brake line	
Heated throttle lever/grips	Standard	
Gauge type	4.5 in. digital display	
Windshield	360 mm/14 in.	
Runner – Carbide	Square 3/8 in – 4 in.	
Bumpers (front/rear)	Std/Std	


// FEATURE HIGHLIGHTS

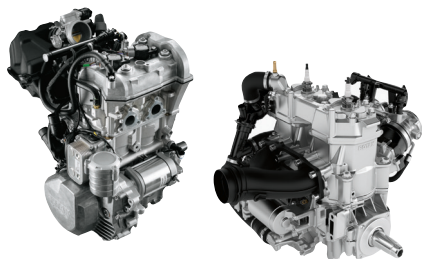

1 Rotax® 600 ACE™ and 600 EFI engines

Two easy-to-own, reliable and fuel-efficient choices. 60 hp* (600 ACE) or 85 hp* (600 EFI) versions ensure great performance and an incredible value.

*Observed HP metric based on internal dyno test in optimal conditions.

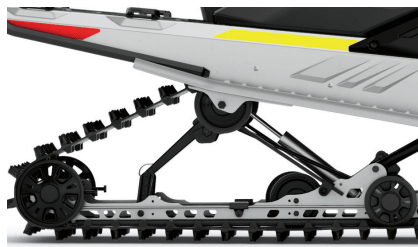

2 HP6™ rear shock

High-quality KYB high-pressure gas shock for excellent performance and reliability.

3 Electric start

Saves time and energy, adding immense value for the rider.



RENEGADE® SPORT
600 EFI SHOWN



4 Ergo-step side panels

Design offers natural progression to three natural positions for different cornering styles, including a new, extreme-forward position.



5 RAS™ 3 front suspension

Stable and precise front suspension design and geometry, optimized for the REV Gen4 platform.



6 Pilot™ 5.7 skis

Deliver outstanding grip and bite in corners with virtually no darting.

ski-doo

